



SMALOX PO1 FURNITURE LOCK

ASSEMBLY AND OPERATING INSTRUCTIONS






CONTENT

Introduction	Comi
Scope of delivery4	Opera
Functional Dimensions	Safet
Components 6	Notes
Assembly and installation instruction 7	

Commissioning of the user software	10
Operating mode of the lock	10
Safety instructions	11
Notes	12



INTRODUCTION

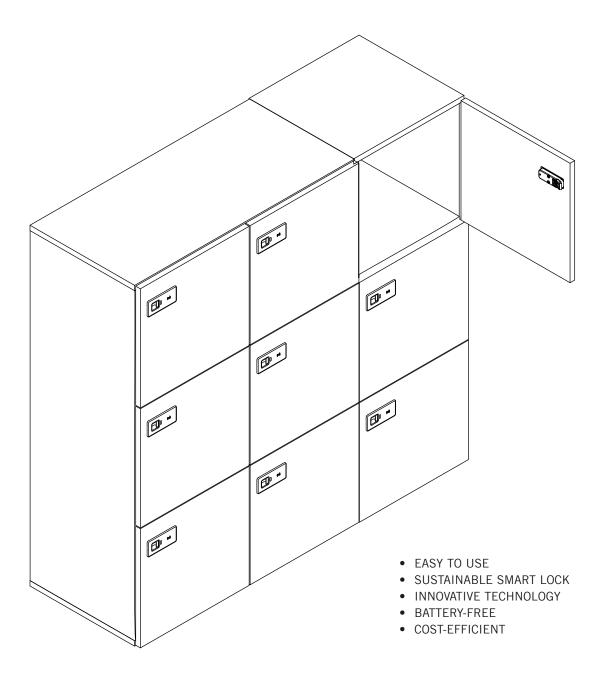


With SMALOX, personal items can be stored simply and securely. No keys or batteries are required for operation - the smartphone's NFC field is used to generate energy. Handling is uncomplicated: the furniture lock is operated using an app. The elimination of wiring and batteries significantly reduces installation and maintenance costs.

Optional management software is available for a large number of locks. This makes it easier for the facility manager to organize and assign authorizations.




SCOPE OF DELIVERY

Scope of delivery 1: for mounting with corner stop

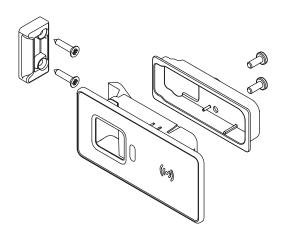



Scope of delivery 2: for mounting with center stop

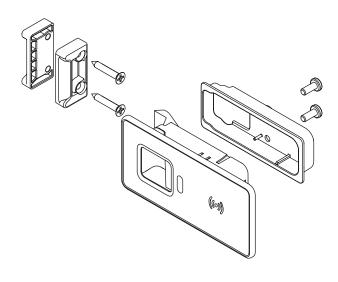




FUNCTIONAL DIMENSIONS

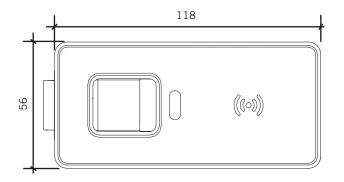



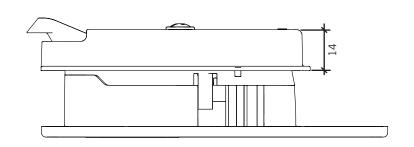


Dimension in mm

* Door requirements Door material:

chipboard or MDF Door thickness: $16-19\ \text{mm}$



COMPONENTS

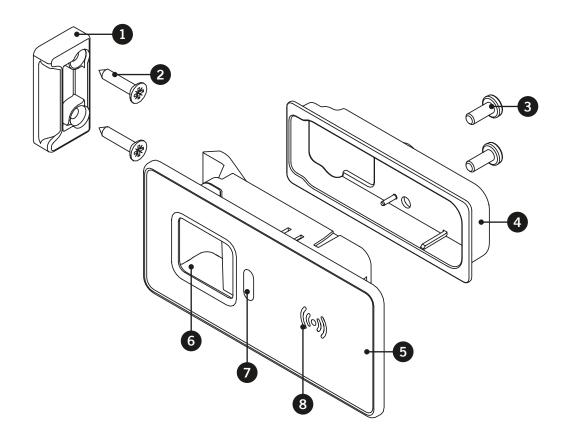


- 1 Locking counterpart
- 2 Wood screws for mounting in furniture
- 3 Pan-head screws
- 4 Mounting cover

- 5 SMALOX P01
- 6 Unlocking | Handle
- Indicator: visual display of the opening status
- 8 NFC antenna area




ASSEMBLY AND INSTALLATION INSTRUCTIONS




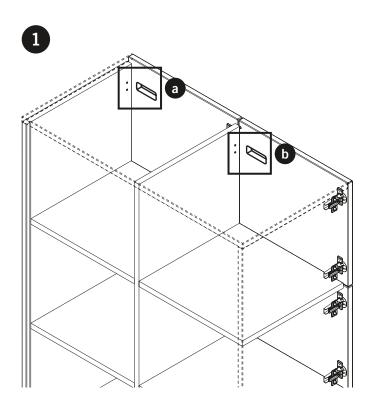


Dimension and position of the cut-out

The following recess is required in the furniture door for mounting SMALOX P01.

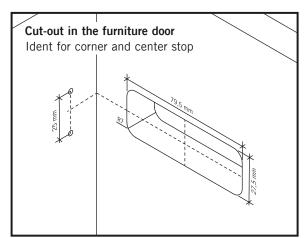

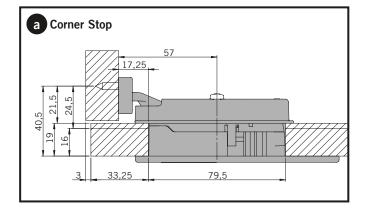


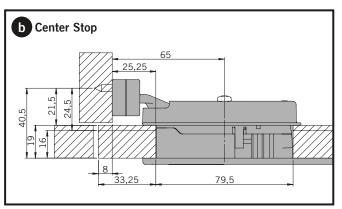




ASSEMBLY AND INSTALLATION INSTRUCTIONS




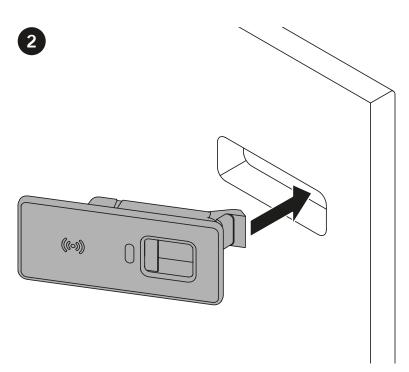

Pre-assembly lock

The lock is inserted from the front through the cut-out in the box door. Note: Note the stop side!

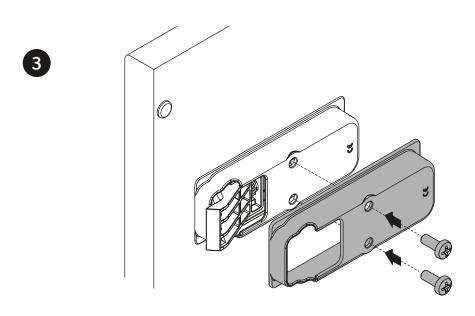




Mounting the lock

Place the mounting cover on the lock from the rear and screw it in place using the pan-head screws supplied and the specified torque (1 Nm).



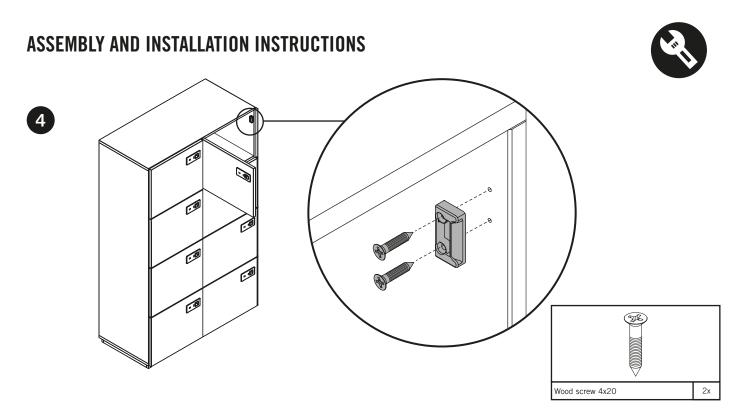

Fitting the counterpart

The locking counterpart is screwed into the furniture with the wood screws in the following position.



COMMISSIONING OF THE USER SOFTWARE



Download App:

- The SMALOX P01 requires the corresponding app on the cell phone for operation. There are 3 options:
- Free SMALOX app (standalone version without cloud connection)
- SMALOX Enterprise App with the fee-based basic management software and cloud connection
- SMALOX Enterprise App with the paid Premium Management Software and cloud connection

Note: The management software enables convenient administration of access and usage authorizations. Thanks to the cloud connection, individual users can be assigned to or removed from a group remotely.













SMALOX

iOS App Store

Android PlayStor

SMALOX Enterprise

iOS App Store

Android PlayStore


Prerequisite for the app to function:

- from version Android 8.0 or higher
- from version iOS 14.0 or higher
- Free SMALOX app (standalone version without cloud connection): The user guidance of the app guides you through the steps of initial commissioning. The person who commissions the lock is the administrator. At some point during the commissioning process, you will be asked for the initial Administrator Password: Administrator Password: 0123456789abcdef. It is recommended to change this factory default password in the next step to increase and ensure security.


Note: If SMALOX is used without the management software, the password cannot be reset if it is forgotten, as there is no way of contacting the administrator. In this case, we recommend making a second person who uses the lock the second administrator.

- 2 SMALOX Enterprise App with the fee-based basic management software and cloud connection. Commissioning under: https://www.smalox.com/de/bueromoeblierung
- 3 SMALOX Enterprise App with the fee-based premium management software und Cloud-connection. Commissioning under: https://www.smalox.com/de/bueromoeblierung

OPERATING MODE OF THE LOCK







lock closed



OPTIONS

SMALOX

With SMALOX, personal items can be stored simply and securely. No keys or batteries are necessary for operation - the NFC field of the smartphone is used for power generation.

Handling is straightforward: the furniture lock is operated via an app. By eliminating cabling and batteries, the installation and maintenance effort is significantly reduced. For a large number of locks, optional management software is available. This facilitates the organization and assignment of permissions for the facility manager.


- · Designed for indoor use: Temperature range +5 °C to +40 °C
- · IP protection class: IP52
- · RoHS & REACH compliance: Yes, CE conformity: Yes
- · Operating system compatibility: from Android version 8.0 or higher, from iOS version 14.0 or higher
- · Communication & power transmission: NFC
- · A compatible mobile phone (with NFC functionality) and the designated software are required for the operation (locking and unlocking) of SMALOX.
- · Can also be ordered as a replacement set

Download App:

SMALOX requires the corresponding app on the mobile phone for operation. There are 3 options:

- · Free SMALOX app (standalone version without cloud connection)
- · SMALOX Enterprise app with paid ENTERPRISE management software and cloud connection
- · SMALOX Enterprise app with paid ENTERPRISE PREMIUM management software and cloud connection

Note: The management software allows comfortable administration of access and usage permissions. Through cloud connection, individual users can be assigned to or removed from a group remotely.

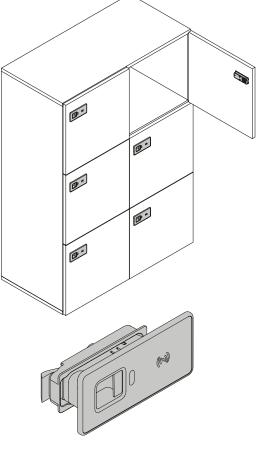

- · Easy to use
- · Sustainable intelligent lock
- · Innovative technology
- · Battery-free
- · Made in Austria



SMALOX

Download on the App Store









Android PlayStore



SMALOX Enterprise









Android PlayStore

Requirements for the app to function:

- · From Android version 8.0 or higher
- · From iOS version 14.0 or higher

FREE SMALOX APP (standalone version without cloud connection)

Note: The following text does not apply to the SMALOX Enterprise app.

The app's user guidance takes you through the steps of the initial setup. The person who sets up the lock is the administrator. At a certain point during the setup process, you will be prompted for the initial Administrator Password. Administrator Password: 0123456789abcdef It is strongly recommended to change this factory-set Administrator Password in the next step to enhance and ensure security.

Note: If SMALOX is used without the management software (i.e., with the free SMALOX app), the password cannot be reset if forgotten, as there is no option for contact. In this case, we recommend making a second person who uses the lock a co-administrator."



OPTIONS

SMALOX - FUNCTION OVERVIEW OF THE APP FAMILY

Further information: $\underline{\text{https://www.smalox.com/office-furniture}}$





FUNCTION DESCRIPTION	SMALOX APP	ENTERPRISE	ENTERPRISE PREMIUM
	Free user software	Paid management software (Cloud Service)	
Lock/Unlock	•	•	•
Self-registration of users	•	•	•
Configurable lock mode	•	•	•
Manage user permissions		•	•
Add/Remove users		•	•
Add/Remove admin		•	•
Registration by admin		•	•
Time-limited access		•	•
Manage locks		•	•
Create & manage structure tree		•	•
Basic statistics		•	•
Detailed statistics			•
Integrate employee database			•
Single-Sign-On			•
Assign permissions by location			•
Assign team compartments			•
Manage number of locks per employee			•
Status report per lock			•
Extended support			•



SAFETY INSTRUCTIONS



Safety instructions for Smalox

- Regular updates: Always keep the operating software and the software application (SMALOX) on your cell phone up to date in order to close possible security gaps and to be able to use new functions.
- · Secure authentication: Use strong, unique passwords for the (initial) login to increase security.
- Regular checks: Regularly check the functionality of the lock and the associated devices to ensure that everything is working properly.
- If you have not purchased management software, keep a list of users and their access rights to be able to track who has access to SMALOX at all times.
- Training: Inform all users about the correct handling and safety practices when using SMALOX P01.
- Recommended installation torque: 1 Nm
- SMALOX P01 is intended for indoor use: Temperature range + 5 °C to + 40 °C
- IP protection class: IP52
- Maximum static load: 350 N
- RoHS & REACH compliance: Yes, CE conformity: Yes
- Compatibility of operating systems: Android, iOS
- Communication & power transmission: NFC
- A compatible cell phone (with NFC functionality) and the appropriate software are required to operate (locking and opening) SMALOX.
- Functionality from Android version 8.0 or higher, from iOS version 14.0 or higher



NOTES	

